


PRO-GROW GRO-CONTROL HUMIDITY CONTROLS

READY TO USE - NO WIRING - JUST PLUG IN.

To Lower Humidity -
Humidity Setting -
80 to 20 % RH

Metal Enclosure

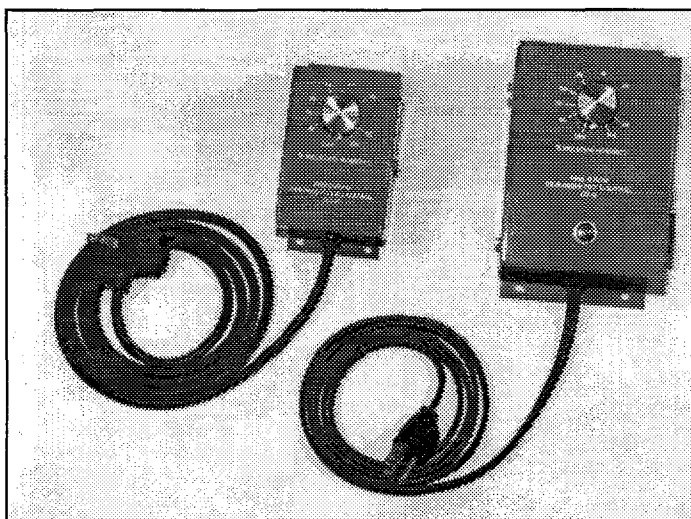

MODEL GC-7

MODEL GC-8

Electrical:

GC-7 - 8 A Res., 1/6HP
Ind. @ 120 V

GC-8 - 12.5 A Res., 1/6
HP Ind. @ 120V

GC-8R - 15 A Res., 1/3
HP Ind. @ 120V

PRO-GROW MODELS GC-7 & GC-8 DEHUMIDISTAT CONTROLS

Dependable proven PRO-GROW quality. Ready to use - no wiring - just plug in. Provides AUTOMATIC ON/OFF CONTROL for Dehumidifying equipment, such as EXHAUST FANS, AIR CONDITIONERS, COOLERS, CIRCULATION FANS, etc.

This low cost device controls humidity just as a thermostat controls temperature. The control will switch on when humidity exceeds the dial setting. The control is adjustable from "OFF" through a normal operating range of 80% to 20% RH to a constant "ON". The control turns "ON" on a relative humidity rise to the dial set point to start the dehumidifying equipment. A decrease in relative humidity to the set point minus the differential (4 to 6% RH) turns the control to "OFF" to stop the dehumidifying equipment.

Turn the control knob clockwise to the setting stop to put the dehumidifying equipment in the constant "ON" position. Set to the "OFF" position by turning the control knob counterclockwise to the stop.

MODEL GC-7 dehumidistat is equipped with a 6 ft. cord with a series cap plug that can be plugged into a 120VAC power source and the dehumidifying equipment can be plugged directly to the cord plug.

MODEL GC-8 is the same as GC-7 except it has a larger enclosure, a grounded 3 wire cord, an outlet receptacle, and a "ON" indicating pilot light.

The controls are enclosed in a heavy gage rugged steel box with Factory Baked enamel finish built to withstand the greenhouse environment.

MANUFACTURED BY

PRO-GROW SUPPLY CORP.

93159

12675 WEST AUER AVE. BROOKFIELD, WI 53005
(262) 781-1150 (800) 331-0590 FAX (262) 781-6907